eternity i

GAS HOT WATER

Internal continuous flow gas hot water heater

THE MORE STARS THE MORE ENERGY EFFICIENT

ENERGY RATING

6 STAR

Endless Hot Water - The claims are true!

Ever taken a shower after someone else, or after the washing machine has been running, only to discover there's only 5 minutes of hot water left? If you often end up leaving the shower shivering, cursing under your breath with conditioner still in your hair, you're a prime candidate for an Eternity 6 Star rated continuous gas water heater.

An Eternity hot water heater continuously delivers up to 1560 litres of hot water per hour, even when another shower or appliances are also drawing hot water.

Continuous savings

The water in a traditional gas hot water heater tank has to be kept hot, whether or not you are currently using hot water. A continuous water heater is an "on demand" system and gas is only consumed during hot water use.

Commercial application

From a single family home to hotels, an Eternity is a compact, versatile and energy efficient hot water system for any application:

- Sport clubs
- Hostels
- Hotels / Motels
- Commercial kitchens
- Aged care
- Child care

System Summary

- Australia's first 6 Star Internal gas hot water system
- Compact design
- 100% room sealed
- Stainless steel coaxial flue system
- Flue up to 12 metres
- Maximum of 3 x 90° elbows
- Preset options available
- Can be installed anywhere internally - Garage, ceiling space, laundry, kitchen cupboard, linen press etc.
- Can be used domestically and commercially
- Temperatures up to 85°C
- No ugly hot water systems on the side walls
- Most diverse range of fluing options in Australia
- Contemporary temperature controllers with temperature ranges from 37°C - 75°C
- Overheat safety cut outs
- Electric consumption only 63 watts
- Minimal flow rate only requires 2.2 L/m to start
- Advanced Japanese technology
- Precise temperature control
- 24/7 back up service and support
- Solar compatible
- Can be manifolded for increased water requirements
- Fully modulating, low NOX multi stage burner configuration
- Electronic ignition

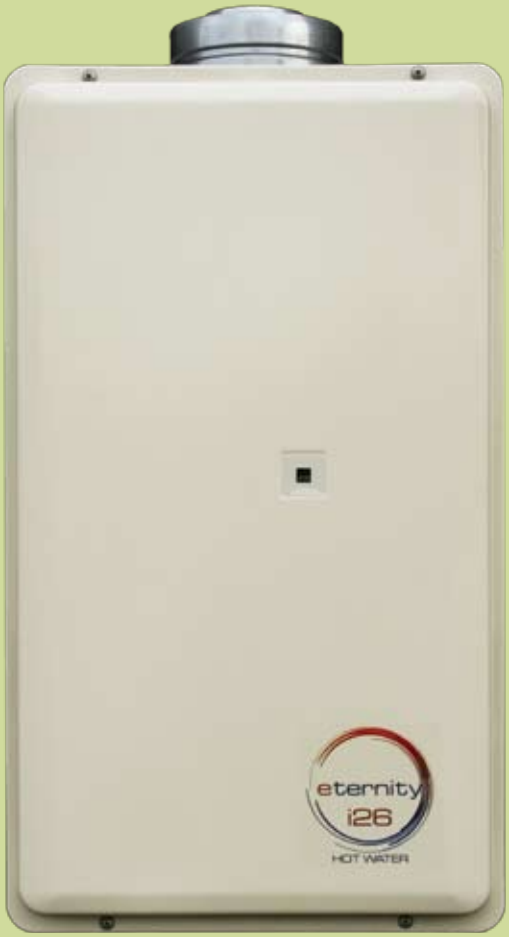

Eternity i26 technical specifications

Specifications	Eternity i26
Gas Energy Rating	6 Stars
Installation	Internal
Gas Consumption (Low & High)	21 / 194
Gas Pressure req. (LPG)	2.75 kpa
Gas Pressure req. (NG)	1.13 kpa
Dimensions mm	H: 610 W:350 D:210
Weight (kg)	20
Min. Water flow (L/min)	2.2
Anti-frost	Optional
Flue System	Forced flue (internal)
Max. Outlet temp. °C	85
Electrical consumption (standard) Watts	62.3
Electrical consumption (Standby) Watts	3.4
kW output	45.6
Power supply (main) V	240
Power supply (controller) V	12
Colour	Beige

				Part Number
Vent Length	Straight	Length 300mm		P0320
		Length 600mm		P0321
		Length 900mm		P0322
	Adjustable	Adjustable Length 175-230mm		P0323
		Adjustable Length 215-310mm		P0324
	Elbow	45° elbow		P0325
		90° elbow		P0326
		Male - Male Adapter		P0327
Vent termination	Horizontal	Straight Termination		P0328
		L Termination		P0330
		Reducer		P0332
	Vertical	Air Intake Pipe		P0333
		Rain Cap		P0334
Others	Support	Support Strap (150cm clearance)		P0335
	Roof Members	Roof Flashing	Base, Cap	P0336
			Adapter B	P0337

Details of installation

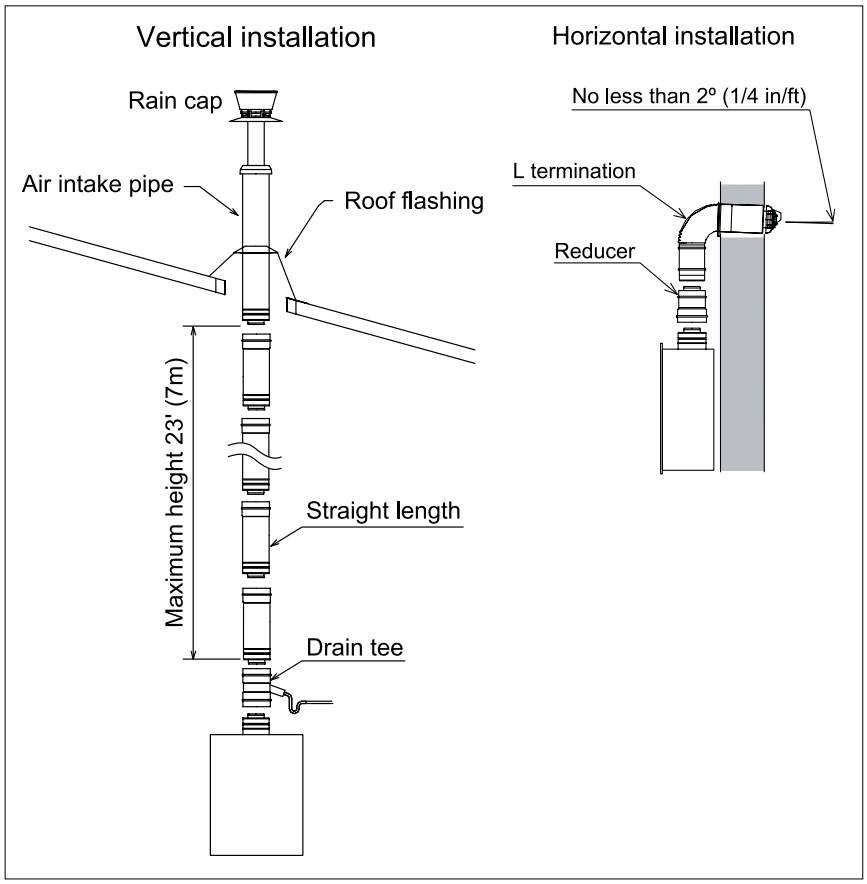

Maximum vent length	
Number of 90° elbow	Maximum vent length
3	7.0m
2	8.8m
1	10.7m

- 10 year heat exchanger warranty
- 3 years on all parts and labour
- 6 stars energy rating
- Continuous hot water flow

Eternity i26 optional products

Temperature remote controller

To discuss your hot water requirements contact your local Chromagen Distributor on 1300 367 565

VIC (head office) 90-92 Woodlands Drive, Braeside VIC 3195 T: +61 3 8587 1500 F: +61 3 9587 9111
QLD 2/60-62 Commercial Drive, Shailer Park QLD 4128 T: +61 7 3806 3016 F: +61 7 3806 3018
WA 108 Radium Street, Welshpool WA 6106 T: +61 8 9350 6002 F: +61 8 9350 5609
SA 93 Harrison Rd, Croydon Park, SA 5008 T: +61 8 8346 8331 F: +61 8 8346 8330
NSW 112 Carnarvon Street Silverwater NSW 2128 T: +61 2 9647 2320 F: +61 2 9647 2413

WaterMark®

Gas Safety Certified™